

## **Command Every Screen Control Every Layer**

P80 is not just another switcher—it's the command center for your most demanding productions. Built to handle up to 20x 4K inputs with effortless precision, P80 empowers operators to master every screen and every layer without compromise. From flawless keying and seamless cut & fill to dramatic live effects, transitions feel instantaneous and under total

Designed for mission-critical shows, P80 delivers dual independent MVR outputs, full-link HDR conversion, and rock-solid reliability. Its 7-inch touchscreen and PixelFlow integration put streamlined control at your fingertips, whether you're driving a live broadcast, a massive stage, or a high-stakes corporate event. With P80, you don't just manage visuals—you command the entire experience.















- Dante DANTE











🚺 PIXELHUE

P80

# **Versatile 4K Connectivity**

The P80 presentation switcher features versatile 4K connectivity including HDMI 2.0, DP 1.2 and 12G-SDI. The P80 is designed with 12x fixed concurrent 4K inputs and a swappable input card with support for P\_HDMI2.0\_DP1.2\_OPT Link Card and Q8\_HDMI2.0+DP1.2+12G-SDI Input Card, making the P80 more capable. The P80 comes with 8x HDMI 2.0 main output connectors allowing for up to 4x 4K concurrent outputs (copy mode) or 8x DL concurrent outputs (split

The P80 also supports 4x 4K flex outputs, 4x 12G-SDI matrix outputs, and 2x dedicated Multiviewer outputs. Additionally, 8x 10G SFP optical ports are offered to copy the HDMI 2.0 outputs, allowing for

#### **Powerful Functionalities**

The P80 employs FPGA-based high-performance image enhancement architecture and real 4K60p 4:4:4 10-bit internal video processing. The P80 supports up to  $8x\ 4K$  mixing main layers and 4x4K mixing PIP layers. Up to 256 presets and 256 layer presets can be saved for easy recall. This powerful multi-screen and multi-layer presentation switcher is ideal for medium to large-scale live events and permanent video wall installations requiring high reliability, unrivaled ease of use, optimal image quality and cutting-edge live 4K processing features. Seamless transitions, smooth video display and various visual effects maximize audience engagement.

# **Flex Output**

The P80 comes with 4x HDMI 2.0 for flex outputs which can be freely configured as independent screens or edge-blended widescreens. Transition effects such as fade, test patterns, AOI, virtual pixels, and more are available for the flex screens. Up to 4x 4K mixing PIP layers and 4x still BKG are supported, allowing for adjustment of layer position, size and Z-order, layer effects including flip, crop and mask, layer color adjustment, and layer presets. In addition, flex outputs support Multiviewer. Auxiliary devices such as teleprompters also can be connected to the flex output connectors. The flex outputs expand the range of

#### **SDI Matrix**

4x 12G-SDI are provided for matrix outputs, allowing any content from the input sources such as HDMI 2.0, DP 1.2 and 12G-SDI, MVR, PGM and flex outputs to be mapped to the SDI matrix. SDI matrix offers more flexible output options for users and enhances the versatility of the P80.

#### **Flexible Control Options**

The P80 is exceptionally easy to control via any of the following options

- 7-inch graphical touchscreen on the front panel
- Event management software PixelFlow
- Third-party control system Stream Deck (Companion integrated into the P80)

In addition, multiple P80 units can be controlled simultaneously from a single event controller/PC with PixelFlow when they are on the same LAN and in the same project.

4K Presentation Switcher



# **KEY FEATURES**

Versatile 4K connectivity: HDMI 2.0, DP 1.2 and 12G-SDI

Up to 12x fixed concurrent 4K inputs and a swappable input card 8x HDMI 2.0 main output connectors configurable as independent screens or

Up to 4x 4K concurrent main outputs (copy mode) or 8x DL concurrent main

outputs (split mode)

 $8x\,10G\,SFP$  optical ports for copying output and long-distance signal

4x HDMI 2.0 flex outputs configurable as independent screens or edge-blended

4x 12G-SDI matrix for mapping any content from the input sources, MVR, PGM and flex outputs to the output

2x HDMI 2.0 for connecting to Multiviewer screens

Up to 8x 4K mixing main layers and up to 4x 4K mixing PIP layers

48kHz 64x64 Dante audio networking hardware and support Up to 256 relative and complete presets for easy recall

Free conversion between SDR, HDR10 and HLG

Advanced DSK capability: smart key, chroma key and luma key

Device backup, copying output, input source backup, and dual power supply redundancy to guarantee stability and reliability  $\,$ Visualized live view of input and output connector statuses for easy

Virtual pixel function for convenient layer configuration

Multiple standard timings such as DMT, CEA, SMPTE and VESA

Custom EDID with support for reduced blanking and HBlank settings

Compatible with EDID on Mac and support for Mac mosaic

HDCP 1.3, HDCP 1.4 and HDCP 2.2 for full-link content protection with a global switch for all inputs or outputs Antistatic settings to keep events smooth and successful

Rugged 4RU chassis with cleanable dust filter

The system has passed 24/7 stability tests and is proven to be stable and

# **SWAPPABLE INPUT CARD**

#### P\_HDMI2.0\_DP1.2\_OPT Link Card

- 2x HDMI 2.0/DP1.2 (Only one type of connector can be selected as the input source at the same time.)
- 2x OPT (100G) for linking to more devices to share input sources (\*to be implemented in future updates)
- HDMI 2.0
- Maximum resolution: 4096×2160@60Hz 8bit 4:4:4 Maximum width: 8192 pixels (8192×1080@60Hz)
- Maximum height: 7680 pixels (1080×7680@60Hz)
- Maximum regnit: //oso pixels (tuoux/osuwounz/)
   Dynamic range: HDR10/HLG/SDR

   Quantization range: Full/Limited
   EDID management (support for standard resolutions and custom resolutions)

   HDCP 2.2 and HDCP 1.4 compliant
- No support for interlaced video signal
   Support for 8-channel embedded audio (24bit/48kHz)
- Maximum resolution: 4096×2160@60Hz 10bit 4:4:4
  Maximum width: 8192 pixels (8192×1080@60Hz)
- Maximum height: 7680 pixels (1080×7680@60Hz)
  Quantization range: Full/Limited
- EDID management (support for standard resolutions and custom resolutions)
   HDCP 2.2 and HDCP 1.3 compliant

- No support for interlaced video signal
   Support for 8-channel embedded audio (24bit/48kHz)



#### Q8\_HDMI2.0+DP1.2+12G-SDI Input Card

- 4x HDMI 2.0 4x DP1.2
- 12G-SDI not available\*
- Maximum resolution: 4096×2160@60Hz 8bit 4:4:4 Maximum width: 8192 pixels (8192×1080@60Hz)
   Maximum height: 7680 pixels (1080×7680@60Hz)
   Dynamic range: HDR10/HLG/SDR
- Quantization range: Full/Limited
   EDID management (support for standard resolutions and custom
- HDCP 2.2 and HDCP 1.4 compliant Support for interlaced video signal
  No support for deinterlacing processing
  Support for 8-channel embedded audio (24bit/48kHz)
- Maximum resolution: 4096×2160@60Hz 10bit 4:4:4
- Maximum width: 8192 pixels (8192×1080@60Hz) Maximum height: 7680 pixels (1080×7680@60Hz)
   Quantization range: Full/Limited
- EDID management (support for standard resolutions and custom resolutions)
   HDCP 2.2 and HDCP 1.3 compliant
- No support for interlaced video signal
   Support for 8-channel embedded audio (24bit/48kHz)

#### Inputs

- 4x HDMI 2.0 4x HDMI 2.0/DP 1.2 (Only one type of connector can be selected as the

- IDMI 2.0:

  Maximum resolution: 4096×2160@60Hz 8bit 4:4:4

  Maximum width: 8192 pixels (8192×1080@60Hz)

  Maximum height: 7680 pixels (1080×7680@60Hz)

  Dynamic range: HDR10/HLG/SDR

  Quantization range: Full/Limited

  EDID management (support for standard resolutions and custom
- HDCP 2.2 and HDCP 1.4 compliant
  No support for interlaced video signal
  Support for 8-channel embedded audio (24bit/48kHz)
- Maximum resolution: 4096×2160@60Hz 10bit 4:4:4 Maximum width: 8192 pixels (8192×1080@60Hz) Maximum height: 7680 pixels (1080×7680@60Hz)
- EDID management (support for standard resolutions and custom
- resolutions)
  HDCP 2.2 and HDCP 1.3 compliant
  No support for interlaced video signal
  Support for 8-channel embedded audio (24bit/48kHz)

- CO-SUI:

  Support for ST-2082 (12G), ST-2081 (6G), ST-424 (3G), ST-292 (HD), and ST-259 (SD) video inputs
  Compatible with SD-SDI, HD-SDI, 3G-SDI and 6G-SDI
  Maximum resolution: 4096×2160@60Hz 10bit 4:2:2
  Support for interlaced video signal
  Support for 8-channel embedded audio (24bit/48kHz)

#### **Main Outputs**

- 8x HDMI 2.0 main output connectors
- Up to 4x 4K concurrent main outputs in copy mode
  Up to 8x DL concurrent main outputs in split mode
- 8x 10G SFP optical ports are offered to copy the HDMI 2.0 outputs.
- Maximum resolution: 4096×2160@60Hz 8bit 4:4:4
   Maximum width: 8192 pixels (8192×1080@60Hz)
   Maximum height: 7680 pixels (1080×7680@60Hz)
   Bit depth: 8bit/1080\*/
- Dynamic range: HDR10/HLG/SDR
   EDID management (support for standard resolutions and custom

- Support for interlaced video signal Support for 8-channel embedded audio (24bit/48kHz)

### **Flex Outputs**

- Configurable as independent screens or edge-blended widescreens with support for Multiviewer, transition effects such as fade, test patterns, AOI,
- Up to 4x 4K mixing PIP layers and 4x still BKG with support for adjustment of layer position, size and Z-order, layer effects including flip, crop and mask, layer color adjustment, and layer presets.

- Maximum resolution: 4096×2160@60Hz 8bit 4:4:4
   Maximum width: 8192 pixels (8192×1080@60Hz)
   Maximum height: 7680 pixels (1080×7680@60Hz)
   Bit depth: 8bit/10bit/12bit
   Color space: YCbCr/RGB
   Dynamic range: HDR10/HLG/SDR
   EDID management (support for standard resolutions and custom resolutions)
- HDCP 2.2 and HDCP 1.4 compliant Support for interlaced video signal Support for 8-channel embedded audio (24bit/48kHz)

#### SDI Matrix

- $4x\,12G\text{-SDI}$  matrix for mapping any content from the input sources, MVR, PGM and flex outputs to the output
- 12G-SDI
- Compatible with HD-SDI, 3G-SDI and 6G-SDI

- **Dante Audio Networking** • Dual redundancy Gigabit Ethernet ports (AES67 compliant)
- Audio de-embedding/embedding on every input & output (raw audio)
- Audio channels from external Dante audio processor can be re-embedded for sending to display, streaming or recording device

### Multiviewer

• 64×64 Dante channels @48 kHz

- 2x HDMI 2.0 for connecting to Multiviewer screens to monitor all the input sources, PVW and PGM.
- Allows users to select independent or copy mode and select a standard resolution and frame rate for the connectors.
- In independent mode, 2x concurrent DL outputs are supported.
   In copy mode, 1x 4K output and 1x copying output are supported
- A variety of Multiviewer layout templates are provided and custom layout is
- The Multiviewer windows can be resized and repositioned, and the width, height and color of the border can be adjusted. Intuitive and upgraded MVR interaction, including maintaining source aspect ratio, snapping between canvas and MVR window, adjusting background color, and customizing UMD color, display content, and font settings, as well as canvas scaling

## **Ethernet**

- 2x Gigabit Ethernet ports used for control and input view
- One works as primary and the other as backup. • Two Ethernet ports share the same IP address.

#### Genlock

- Genlock synchronization signal input
- Genlock synchronization signal output (with support for loop-through)

#### Screens

- Output connectors can be freely configured as independent screens or edge-blended widescreens.
- Users can arrange the mosaic layout manually or select a layout template. If a connector used for mosaic fails, it can be replaced with another normal connector in the software.
- Edge blending and LCD bezel compensation Virtual pixel configuration is supported, simplifying calculations between on-site screen size and P80-loaded screen pixels.
- AOI (Area of Interest) feature to customize active areas of outputs Custom test patterns

#### Layers

- Layer names are displayed and can be modified.
- Layer presets: All (or a portion) of the current layer's properties (such as input source, position, size, effects, etc.) can be saved as a layer preset in PixelFlow for easy recall. Up to 256 layer presets can be saved.

#### **Presets**

- Relative and complete presets are supported to satisfy more application requirements.
- Allows users to select preferred parameters such as transition duration and input source to save to a preset.
- · Presets can be loaded to PVW or PGM.

- **BKG**
- Images imported from the control computer or event controller can be used as BKG.
- One dedicated still BKG image available on each PGM output. Up to 4 still BKG
- The BKG image can be changed and deleted.
- The BKG image automatically scales to fit the screen while maintaining aspect ratio and is positioned at the bottom layer by default.
- **Transition & Effects**
- Customizable transition duration (0.1s to 10s)
- Fade in and out supported • Screen freeze and FTB (Fade to Black) supported

#### **PixelFlow Software Functionalities**

- Long-term stable running • Upgraded and visualized UI, adaptive to U5/U5 Pro/PC screens
- One click to change skins of U5/U5 Pro buttons • Software parameter controllable by U5/U5 Pro encoders or faders • Distinct function areas and hover menu for ease of use
- Fully functional simulator for offline configuration and practice

#### **Processing Capability**

- FPGA-based high-performance image enhancement architecture
- BT.601, BT.709, BT.2020, DCI-P3 color space processing support • Free conversion between SDR, HDR10 and HLG


#### **Supported Resolutions**

• Compatible with HDCP 1.3, HDCP 1.4 and HDCP 2.2


прос	Dit Deptil	Sampung ronnac	Supported Resolutions	Bandwidth
HDMI 2.0	8bit	RGB 4:4:4 YCbCr 4:4:4 YCbCr 4:2:2	4096×2160@60Hz 8192×1080@60Hz	
	10bit	RGB 4:4:4 YCbCr 4:4:4	4096×2160@30Hz 4096×1080@60Hz	18 Gbps
		YCbCr 4:2:2	4096×2160@60Hz	
	12bit	RGB 4:4:4 YCbCr 4:4:4	4096×2160@30Hz 4096×1080@60Hz	
		YCbCr 4:2:2	4096×2160@60Hz	
DP 1.2	8bit	RGB 4:4:4 YCbCr 4:4:4 YCbCr 4:2:2	8192×1080@60Hz 4096×2160@30Hz 3840×2160@60Hz	21.6 Gbps
	10bit	RGB 4:4:4	– 8192×1080@60Hz 4096×2160@60Hz – 3840×2160@60Hz	
		YCbCr 4:4:4		
		YCbCr 4:2:2		
	12bit	RGB 4:4:4 YCbCr 4:4:4	4096×2160@30Hz	
		YCbCr 4:2:2	8192×1080@60Hz 3840×2160@60Hz	
12G-SDI	10 bit	YCbCr 4:2:2	4096×2160@60Hz	11.88 Gbps




# **APPLICATION**

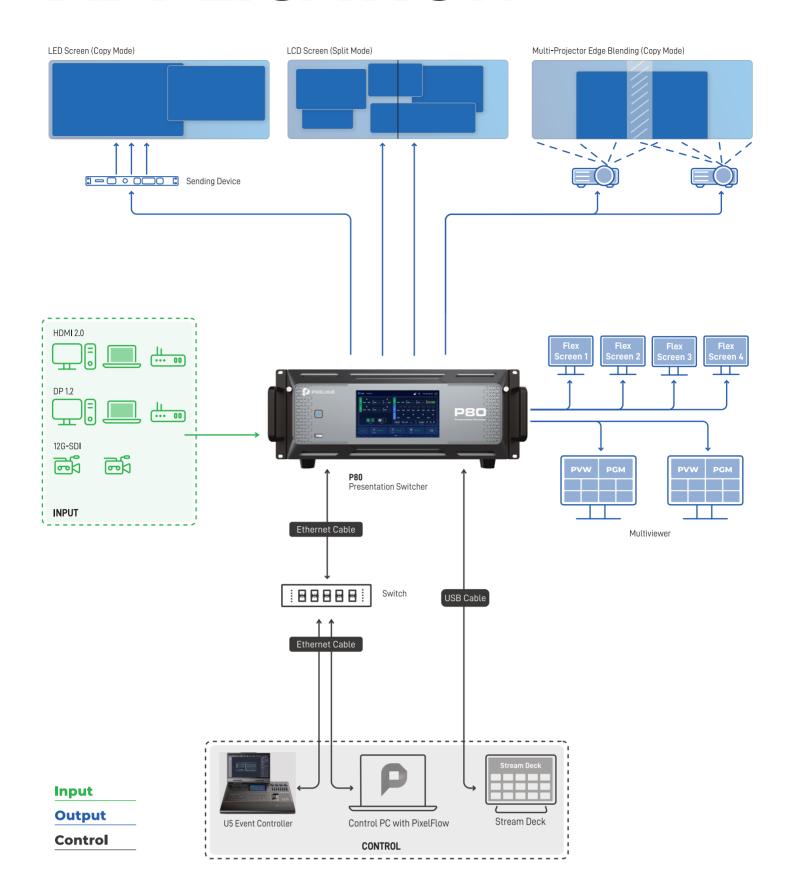

# **Dimensions**

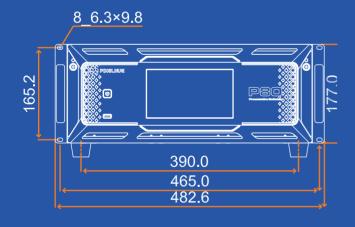



Unit: mm

# **Specifications**

#### **Front Screen**

#### Chassis

#### **Dimensions**

W 482.6 mm × D 536.0 mm × H 177.0 mm

#### Weight

Gross weight (packed with flight case): 59.6 kg / 131.4 lbs

#### **Electric Parameters**

Max power consumption: 450 W

# **Noise on Average**

(@1, 0.75m height)

#### **Operating Environment**

Humidity: 5% RH to 85% RH, non-condensing

#### **Storage Environment**

Humidity: 5% RH to 95% RH, non-condensing

#### **Certifications**

FCC, IC, CE, RoHS, CE, KC

#### **Packing Information**

- 1x Flight case 2x AC power cords 1x DC power cord
- 1x Ethernet cable
  3x HDMI cables
- 3x DP cables
- 1x Phillips screwdriver
  1x Customer Letter
- 1x Quick Start Guide
  1x Safety Manual
  1x Certificate of Approval